
## henflow BATH FITTINGS

Brass angle valve chromium plated with tricorn handle, hot or cold.

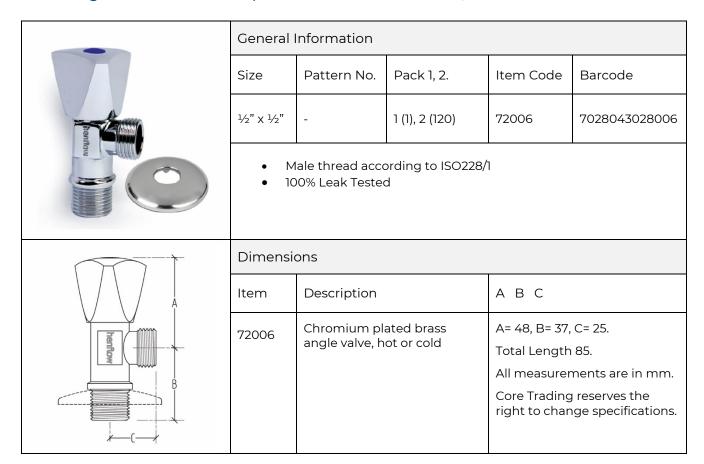

| Pressure & Temperature |                                          |                                                   |                  |                                         |  |
|------------------------|------------------------------------------|---------------------------------------------------|------------------|-----------------------------------------|--|
| Description            | Minimum Operating<br>Pressure. bar / psi | Maximum Operating<br>Pressure. bar / psi          | Test Pressure    | Operating<br>Temperature<br>(°C / °F)   |  |
| Brass Angle Valve      | No Min. Operating<br>Pressure            | 10 bar / 145 psi                                  | 11 bar / 160 psi | from 0°C to +80°C<br>from 32°F to 176°F |  |
| Materials              |                                          |                                                   |                  |                                         |  |
| Part                   |                                          | Material                                          |                  |                                         |  |
| Body                   |                                          | Forged Brass Body (polished, chrome plated)       |                  |                                         |  |
| Headwork               |                                          | Brass                                             |                  |                                         |  |
| Stem                   |                                          | Brass                                             |                  |                                         |  |
| Seat                   |                                          | Brass                                             |                  |                                         |  |
| Indices                |                                          | Plastic (supplied with both hot and cold indices) |                  |                                         |  |
| Handle                 |                                          | Zinc Alloy with Chromium Plated                   |                  |                                         |  |

| Standard Packing Details |                                       |                                             |                                            |  |  |
|--------------------------|---------------------------------------|---------------------------------------------|--------------------------------------------|--|--|
| Item Weight              | Inner Box Contains<br>Box Weight (kg) | Outer Carton Contains<br>Carton Weight (kg) | Full Pallet Contains<br>Pallet weight (kg) |  |  |
| 0.190 kg                 | 1 -                                   | 120                                         | -                                          |  |  |

## Guarantee

henflow bath fittings guarantee - Terms and Conditions.

henflow products subject to a 5 year guarantee that is between Core Trading and the final purchaser of the products.

The guarantee is subject to proof of purchase being supplied. This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of homeowners, domestic and commercial applications and therefore the guarantee is subject to the product being properly selected for their intended service conditions. Product installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Destructive behavior and accidental damage to the product are uncovered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to fitting or consequential damages.





